


MC 系列 MC 130


最长吊臂长度: 61,3 m
 臂端吊重: 60 m / 1,3 t
 最大独立高度: 44 m
 最大起重量: 6 t

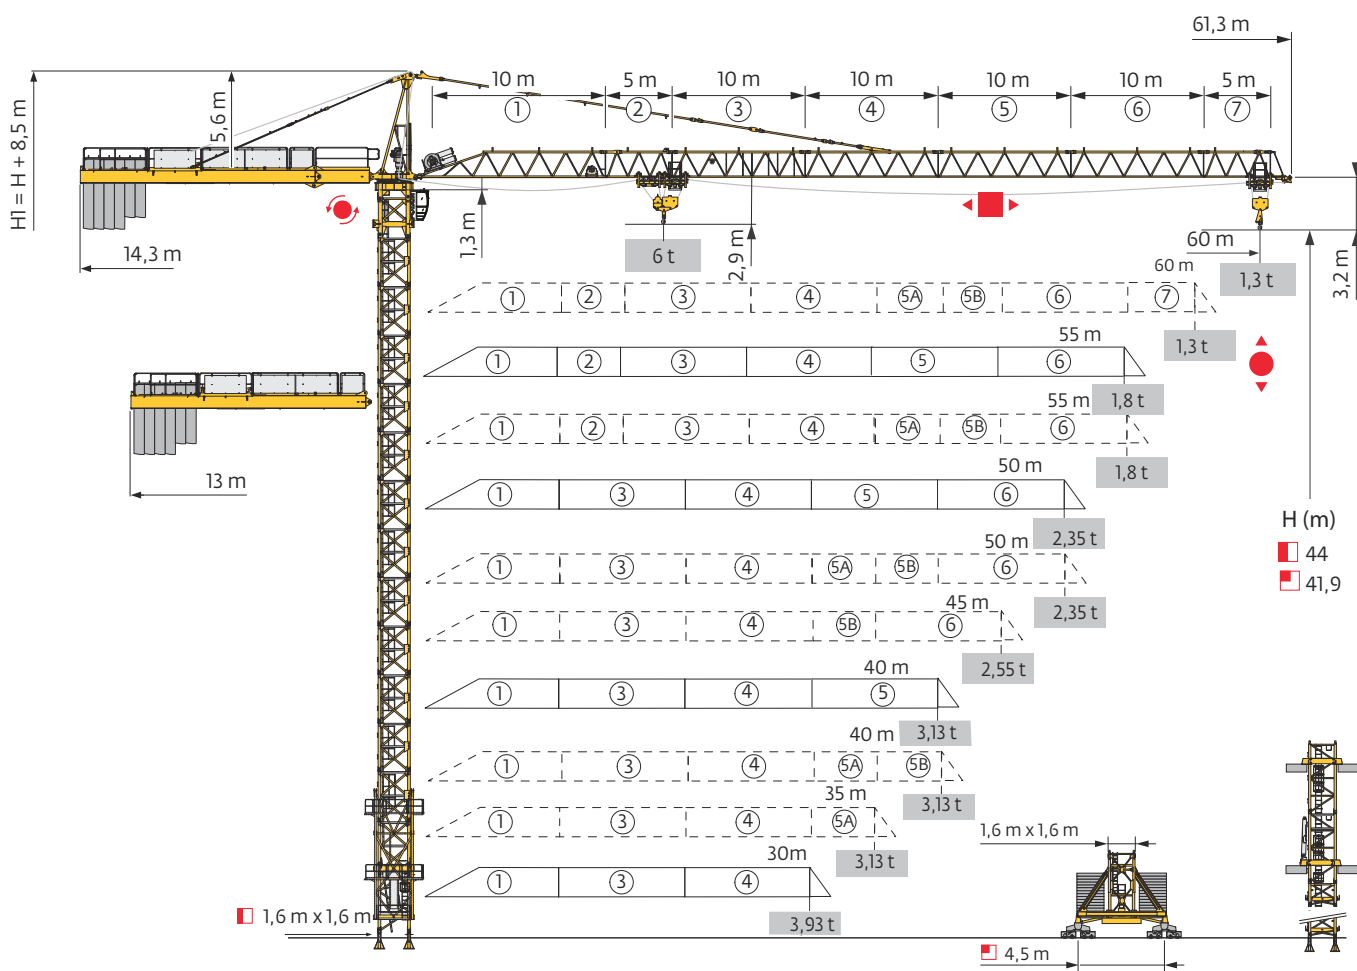


塔身组成 - 反力

□ 1.6 m

▲▲▲ 30 m → 60 m

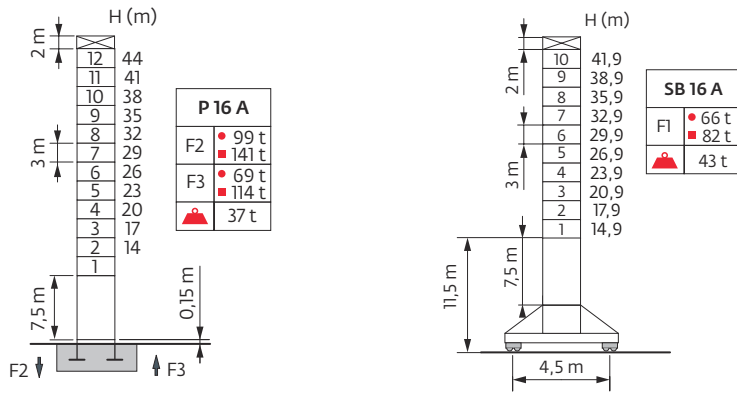


内爬塔机

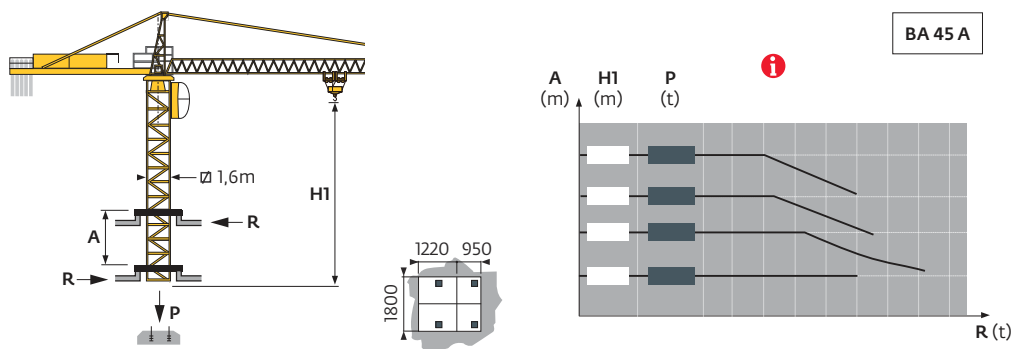

附着

P 16 A

AL 400

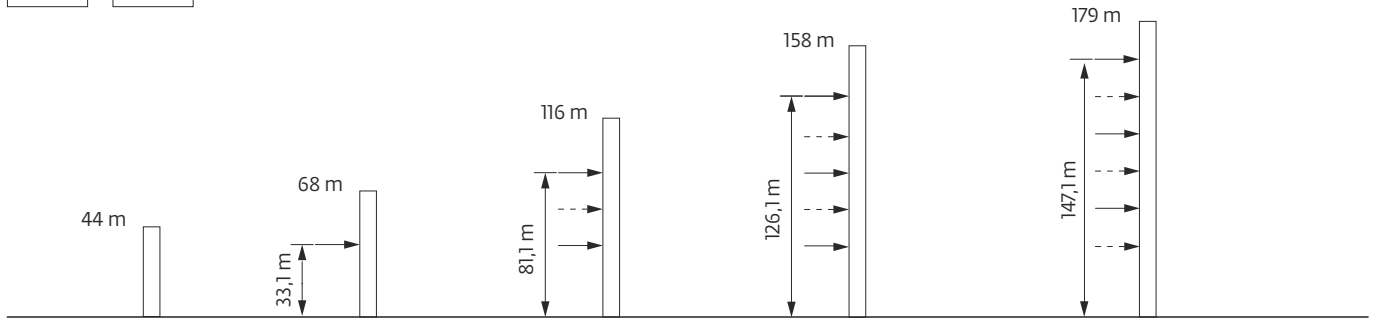


i H > 180m




负荷曲线










△ (m)		15	17	20	22	25	27	30	32	35	37	40	42	45	47	50	52	55	57	60
60m	3,1 → 15,8	3 t														6 t				
55m	3,1 → 18,6	3 t														6 t				
50m	3,1 → 20,9	3 t														6 t				
45m	3,1 → 20,2	3 t														6 t				
40m	3,1 → 21,4	3 t														6 t				
35m	3,1 → 20,4	3 t														6 t				
30m	3,1 → 21,0	3 t														6 t				




压重

 1,6 m	SB 16 A 	H (m)	41,9	38,9	35,9	32,9	29,9	26,9	23,9	20,9	17,9	14,9
		 (t)	84	72	54	54	48	48	48	48	48	48


起重臂重量&平衡臂配重

	 (kg) (+/- 5%)		40 LVF 					
			3450 kg	2250 kg	 (kg)	3700 kg	2250 kg	 (kg)
60 m	8180	8695	5	0	17 250	4	1	17 050
55 m	7935	8450	-	-	-	5	0	18 500
50 m	7315	7830	4	1	16 050	4	1	17 050
45 m	6920	7435	3	2	14 850	3	2	15 600
40 m	6790	7305	3	2	14 850	-	-	-
35 m	6431	6946	1	4	12 450	1	4	12 700
30 m	5975	6490	2	2	11 400	2	2	11 900


CCB - 3700 kg





CD - 3450 kg













CE - 2250 kg







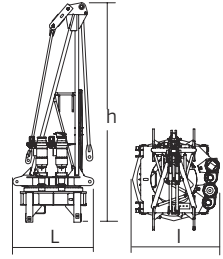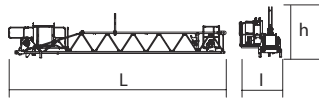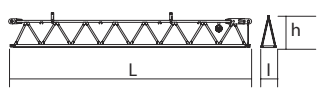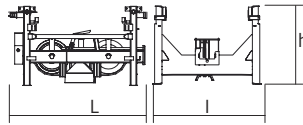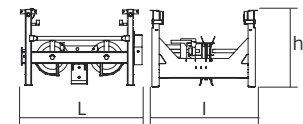


尺寸重量表



塔机回转部分:  60 m -  40 LVF 15

塔机回转部分	L (m)	l (m)	h (m)	kg (+/-5%)	
平衡臂	 	11,94 1,68	1,46 1,17	1,40 0,26	2215 370
驾驶室		1,68	1,18	2,31	385
塔帽		2,37	1,92	6,97	4680
起重臂根部节		10,12	1,3	1,16	3200
起重臂节		10,2 10,3 10,3 10,3	1,1 1,1 1,1 1,1	1,3 1,3 1,3 1,3	1125 1275 815 525
起重臂节		5,2 5,22 5,19 5,2	1,1 1,1 1,1 1,1	1,3 1,2 1,2 1,3	620 456 420 245
后小车		1,4	1,3	0,9	160
前小车		1,5 1,3	1,4 1,3	1 0,9	180 155
吊钩		1,3 0,78	0,3 0,3	1,55 1,55	330 115


顶升装置		L (m)	l (m)	h (m)	kg (+/- 5%)	
顶升套架		∅1,6 m	6,8	3,65	3,9	3430
塔身节						
S 46 J		∅1,6 m	7,8	1,8	1,7	2630
L 46 A3		∅1,6 m	3,24	1,67	1,73	1180
塔机底座						
固定支脚		P 16 A	1,14	0,49	0,49	185
		R 16 A	0,69	0,5	0,5	145
行走基节			3,61	1,96	1,96	2645
斜撑			3,18	0,25	0,24	230
底架			5,08	0,61	1,79	1115

















机构


380 V -50 Hz													hp	kW	
	40 LVF 15 (GH)	m/min	5	14	42	64	85	3	7	21	32	42,5	40	30	400 m
		t	3	3	3	2,25	1,5	6	6	6	4,5	3			
	4 D3 V3	m/min	15 → 30 → 58									4	3		
	RCV 145	tr/min	0 → 0,8									2 x 6	2 x 4,4		
	RT 324	m/min	12,5 → 25									2 x 7	2 x 5,2		


 IEC 60204-32	 kVA
380 V (+10% -10%) 50 Hz	40 LVF : 45 kVA

40 LVF 15



-  上翘度
-  工作状态下的反力
-  非工作状态下的反力
-  起重机在无载荷、无配重、独立高度状态下的压重
-  总配重
-  13, 4m卡车
-  40⁺立方集装箱
-  紧固的附着框
-  松开的附着框
-  起升
-  变幅
-  回转
-  行走
-  额定功率
-  参阅内爬
-  联系我们

 此文档并非契约，鉴于持续改善和技术发展原因，本公司可在未通知的情况下，保留对规格、设备和价格的变更权。



马尼托瓦克起重设备（中国）有限公司

工厂地址：江苏省张家港市经济开发区（南）区金塘路55号
 市场总部：上海市漕溪北路333号中金国际广场B座1103-1105室
 总机：021-6457 0066
 传真：021-6457 4985
 邮编：200030