



# D800-42

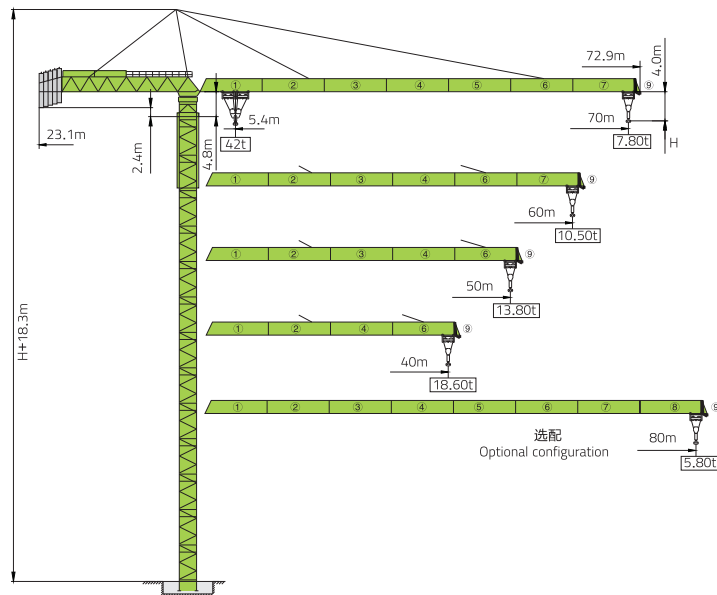


|     |     |       | (kg) | PHZ10700 | PHZ7800 | PHZ6000 |
|-----|-----|-------|------|----------|---------|---------|
| 80m | 23m | 53500 | 5    | 0        | 0       |         |
| 70m | 23m | 48800 | 4    | 0        | 1       |         |
| 60m | 23m | 39900 | 3    | 1        | 0       |         |
| 50m | 23m | 35200 | 2    | 1        | 1       |         |
| 40m | 23m | 29200 | 2    | 1        | 0       |         |

Final product specification shall be in accordance with purchase order or sales contract only

## 塔身 Masts / 反力 Reactions

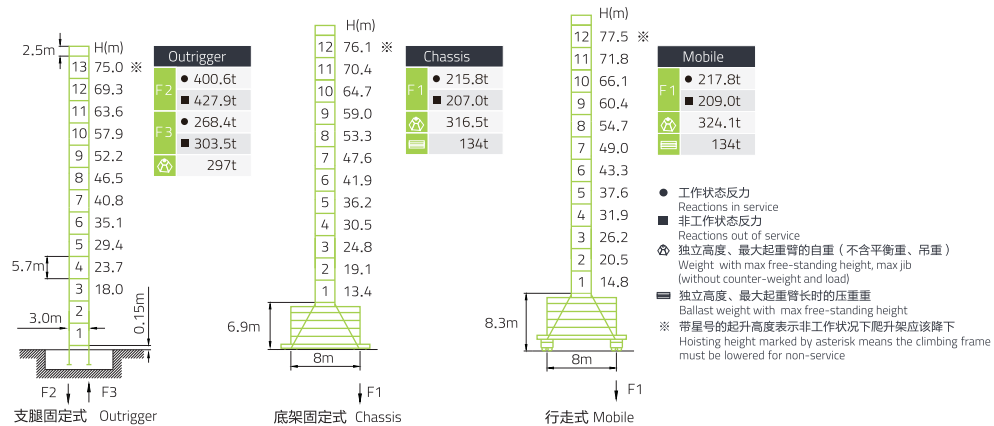

## 附着 Anchorages

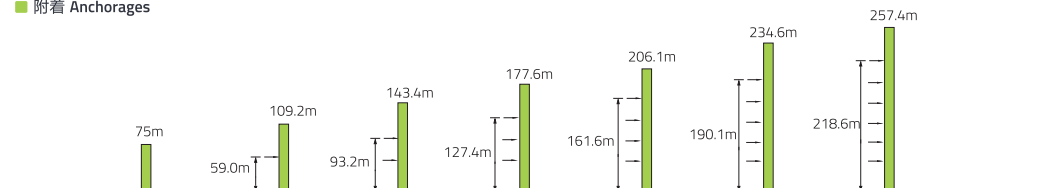







# D800-42

## 起重特性 Load Diagram

|  |   | Max.Capacity<br>m/t | 15.0  | 20.0  | 25.0  | 30.0  | 35.0  | 40.0  | 45.0  | 50.0  | 55.0  | 60.0 | 65.0 | 70.0 | 75.0 | 80.0 |
|---|---|---------------------|-------|-------|-------|-------|-------|-------|-------|-------|-------|------|------|------|------|------|
| 80<br>(R=82.9)  |  | 5.4~29.60/21        | 21.00 |       |       | 20.66 | 17.15 | 14.56 | 12.58 | 11.01 | 9.73  | 8.67 | 7.78 | 7.03 | 6.37 | 5.80 |
|   |  | 5.4~15.90/42        | 42.00 | 31.36 | 23.54 | 18.51 | 15.00 | 12.41 | 10.42 | 8.85  | 7.57  | 6.52 | 5.63 | 4.87 | 4.21 | 3.64 |
| 70<br>(R=72.9)  |  | 5.4~31.84/21        | 21.00 |       |       | 18.75 | 15.95 | 13.80 | 12.10 | 10.72 | 9.58  | 8.62 | 7.80 |      |      |      |
|   |  | 5.4~17.02/42        | 42.00 | 34.28 | 25.83 | 20.39 | 16.59 | 13.79 | 11.65 | 9.95  | 8.57  | 7.42 | 6.46 | 5.64 |      |      |
| 60<br>(R=62.9)  |  | 5.4~34.10/21        | 21.00 |       |       | 20.36 | 17.35 | 15.04 | 13.21 | 11.73 | 10.50 |      |      |      |      |      |
|   |  | 5.4~18.16/42        | 42.00 | 37.24 | 28.14 | 22.29 | 18.21 | 15.20 | 12.87 | 11.06 | 9.57  | 8.34 |      |      |      |      |
| 50<br>(R=52.9)  |  | 5.4~35.30/21        | 21.0  |       |       | 18.09 | 15.70 | 13.80 |       |       |       |      |      |      |      |      |
|   |  | 5.4~18.76/42        | 42.00 | 38.80 | 29.36 | 22.29 | 19.06 | 15.94 | 13.54 | 11.64 |       |      |      |      |      |      |
| 40<br>(R=42.9)  |  | 5.4~36.12/21        | 21.00 |       |       | 18.60 |       |       |       |       |       |      |      |      |      |      |
|   |  | 5.4~19.17/42        | 42.00 | 39.86 | 30.20 | 23.98 | 19.64 | 16.44 |       |       |       |      |      |      |      |      |

## 传动机构 Mechanisms

| 配置 Configuration  |                                    |               | b       |      |      | bb   |      |      | kW           |  |
|---|------------------------------------|---------------|---------|------|------|------|------|------|--------------|---|
|   |                                    |               | III     | IV   | V    | III  | IV   | V    |              |   |
| <br>起升<br>Hoisting   | QPL4275                            | m/min         | 30.0    | 60.0 | 75.0 | 15.0 | 30.0 | 37.5 | 132          | 1070m <sup>⊙</sup><br>(8layers)   |
|   |                                    | t             | 21.0    | 10.5 | 4.0  | 42.0 | 21.0 | 8.0  |              |   |
| <br>回转<br>Slewing    | HVV145B1.130C×3<br>HVV145B2.130C×1 | r/min         | 0~0.6   |      |      |      |      |      | 4×145<br>N.m | ① 超出咨询我们<br>Consult us<br>if overtop  |
| <br>变幅<br>Trolleying | BP185                              | m/min         | 0~50    |      |      |      |      |      | 18.5         |   |
| <br>行走<br>Travelling | ZAK52-B×2<br>ZBK52-B×2             | m/min         | 25/12.5 |      |      |      |      |      | 4×5.2        |   |
|                      | 380V(±10%)50Hz                     | 180.5+4×5.2kW |         |      |      |      |      |      |              |   |